

MUSWAY

MUSIC IS THE WAY

MQ


CAR AUDIO SPEAKERS

INSTALLATION NOTES

The first step of installing a speaker system is thorough planning. Choose a suitable location for your speaker components carefully. Follow these

1. Choose a location that offers the least amount of obstruction between the components and your ears. Pay also attention to the position of the seats, headrests and other constructional systems in the interior space of the car.
2. Try to mount the speakers on the same arrangement. They should be installed at the same height and directly across from each other. Do not mount one speaker higher, lower, further forward or further backward from the opposite speaker.
3. The tweeter should always be installed as close as possible to the midbass speaker.
4. Always take a look behind the chosen mounting locations to ensure that there is proper clearance for the rearside of the speakers and avoid obstructions such as window tracks, wire harnesses, gas tank etc.
5. Maximum performance is achieved when the speaker is securely mounted to a door panel or rear speaker deck. There should be no gaps between the speaker basket and the mounting surface
6. Please handle the components with care, otherwise they will get damaged.
7. Please pay attention to the correct polarity (+ or -) for all terminals and connections.
8. Never connect the speakers to the electrical ground or with the body of the vehicle

INTERCONNECTION MQ5.2C, MQ6.2C, MQ6.2T

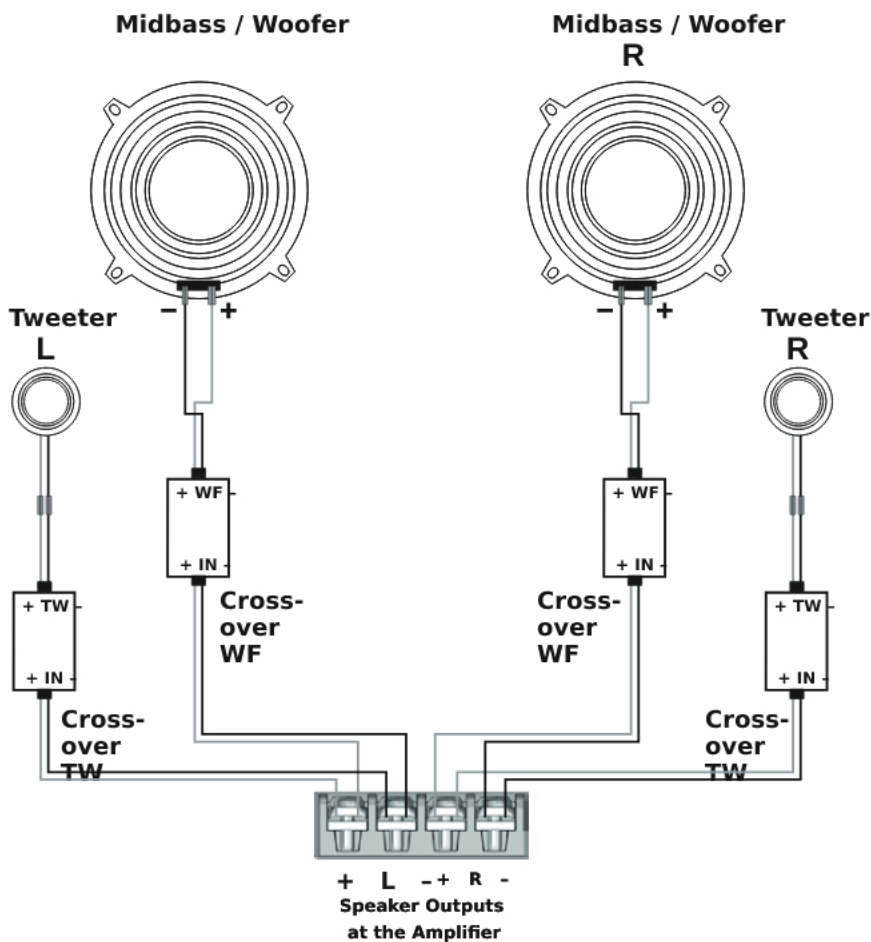

IMPORTANT:


Please pay attention to the correct polarity (+ or -) for all terminals and connections.

TWEETER ATTENUATION MQ5.2C, MQ6.2C, MQ6.2T



Optional: Pull off the housing of the tweeter crossover (TW).
Underneath is a jumper which can be plugged into three positions:

INTERCONNECTION MQ42, MQ52, MQ62, MQ6.2W

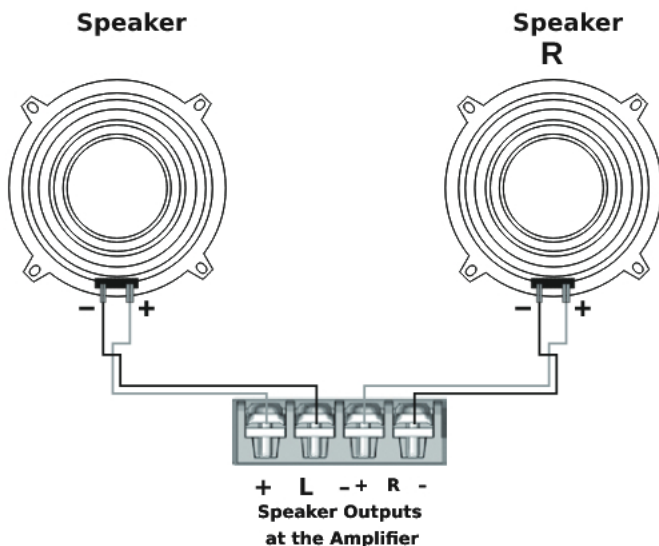

IMPORTANT:

Please pay attention to the correct polarity (+ or -)
for all terminals and connections.

MUSWAY

MUSIC IS THE WAY

MUSWAY is a brand of Audio Design
26820 Hobie Cir. Suite A-1
Murrieta, CA 92562 USA
www.muswayusa.com